



375A Illuminated Directory with 2 columns. Size 24" wide x 24" high x 3" deep.

Features

- *Elegant 3" Thin Profile*
- *Monolithic Door Style*
- *Concealed Door Frame*
- *Interchangeable Name Strips*
- *1" Slimline Fluorescent Tubes*
- *Low Heat Emission*



375 Illuminated Directory mounted into a custom fiberglass kiosk

Section Drawing Legend

- 1 Aluminum Frame Housing
- 2 Frameless Door Panel
- 3 #14 Greylite Glass Door
- 4 Strip Carrier Retainer Frame
- 5 Film Strip Carriers
- 6 Translucent White Diffuser
- 7 Fluorescent Lamp
- 8 Continuous Hinge at top/side
- 9 Aluminum Back - .050 Thk
- 10 Film Name Strips

Technical Data

The 375A Series, "Thinline", Illuminated directory features an elegant thin profile design which utilizes 1" Slimline fluorescent lamps and has a directory depth of 3". This low silhouette style directory is slimmer and lighter than most now available in the marketplace. A single aluminum extrusion forms the outer perimeter frame and provides housing for all directory components. The monolithic cover panel displays a translucent black background field with only illuminated copy or other graphic media.


Door Panel Information

The door panel is an unframed design with a concealed continuous hinge and door latching mechanism. The glass extends within 1/16" of all the edges which provides a monolithic appearance. Door Panel Material: 7/32" #14 Greylite glass with 14% visible light transmittance. The glass is tempered and all edges are finished with a fine bevel. Concealed door retainers are standard but exposed tamper-proof retainers can be specified. Custom or non-standard Sizes are available. Multiple door configurations can be specified.

Standard Directory Sizes

Columns	1	2	3	4	5
Width	11"	18"	24"	32"	38"

Standard Widths	11", 18", 24", 32", 38"
Standard Height	18", 24", 32", 38"

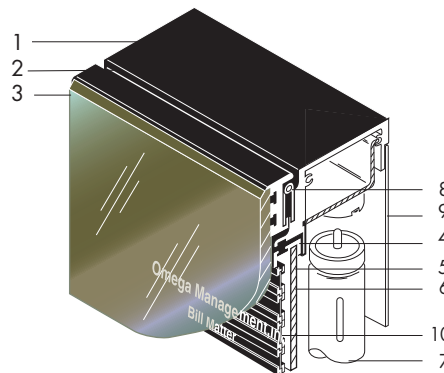

Aluminum Frame Finishes

Anodized black duranodic, medium bronze duranodic 312 and clear satin natural.

Illumination Information

Light source: 1" diameter fluorescent tube lamps, standard cool white.

Note: the 1" diameter lamp emits less heat, yet displays the same light output as the 1 1/2" diameter lamps of the 350A & 360A Series.

Electrical rating: 120 volts, 60 hertz, and 277 volts available on special order. Directories are a **UL listed product**

Quantity: One tube per each copy column connected to ventilated raceway.

Lamp removal: Easy front access by releasing a spring retainer and removing the light diffuser panel.

Mounting Information

Standard mounting is surface wall mount, but units can be installed fully recessed or semi recessed as required. All fully recessed mounted directories require a one half-inch reveal area around the entire perimeter frame to enable the door to open on its pivot.

Freestanding Three-dimensional Units

All directories can be installed into custom consoles or molded fiberglass structures to form multi-functional information centers.

Film Name Strip Information

The name strip is a film negative strip with only the letterforms illuminated through a black background. Size: 3/8" x 6 17/32". Approximately 20 strips per column vertical foot can be estimated. To calculate strips per column, multiply .5625" x required vertical dimension. Standard Column Width: 7 1/16" on center. Film Strip Carrier Data: the film strips carriers support and retain the film negative name strips and are made from injection molded black nylon. Size: 9/16" x 6 11/16". Standard Header Panel height: 5" with a 4" exposed image height area. Larger 1" x 10" wide strips are available for reduced capacity of strips.

Fabrication Drawings

Complete working drawings for each individual unit indicating elevations, sections and mounting details are provided for approval.